


# FUTON ASSEMBLY INSTRUCTIONS

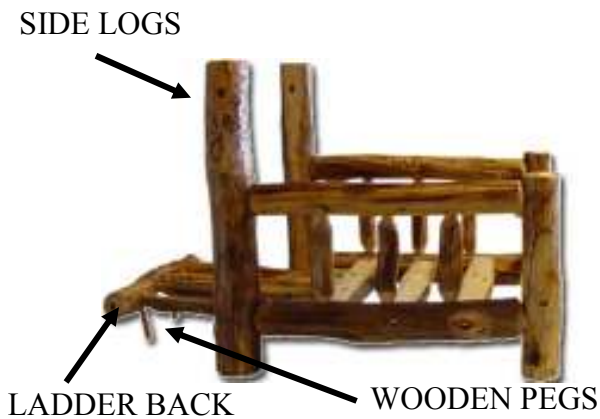

## STEP 1:


Pre-assemble the futon. Insider the LADDER BACK and lay it down with the 2 drilled holes facing down (these will allow for the WOODEN PEGS to be used for feet as shown).

***IMPORTANT NOTE: The FRONT LOG should be tilted slightly at an angle so that the mattress will have a comfortable slope (see picture to step 2)***

## STEP 2:

With a bolt and washer together, bolt all of the rails but do not bolt the LADDER BACK so that it can rotate freely. Once everything is tightened raise the LADDER BACK and insert the WOODEN PEGS.

***IMPORTANT NOTE: The SIDE LOGS may be tight when you place the LADDER BACK in the upright position. This is preferred. Gently move the SIDE LOGS so that the ladder will fit. If there is a gap, much like a chiropractor, adjust the SIDE LOGS by pushing them inward beyond the point where the LADDER BACK sits. This will result in a tighter fit.***

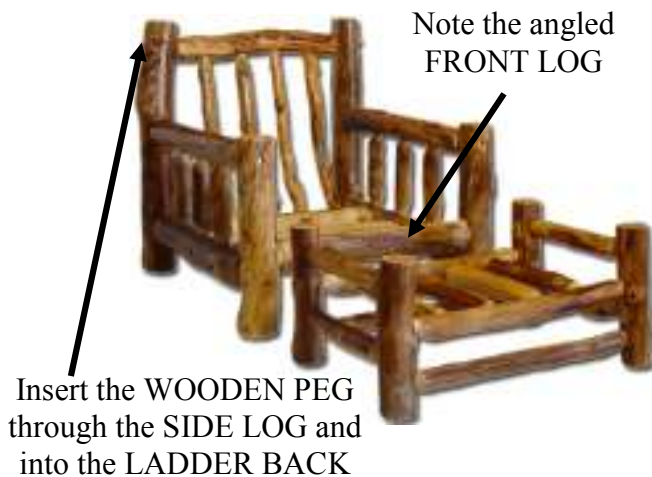

## STEP 3:

Cover the bolt holes with the plugs and enjoy your new aspen log futon!

